



Colour Touch Screen Thermostat Code: WF TH03

Installation Sheet


For more information or for warm floor technical support.

Please visit www.warmfloornz.com

Fitting instructions

The TH3 can be mounted vertically only.


Detach the face plate from the wall plate using a flat head screw driver.

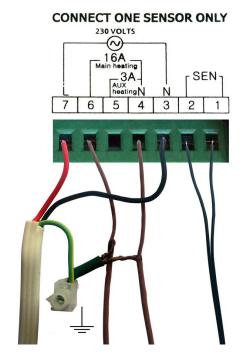

After the electrical connections have been made and checked, screw the thermostat to the wall with the screws provided.

Re-fit the face plate. Satin or Black face plates sold separately.

Technical Specifications	
Input voltage:	230VAC <u>+</u> 10%
Frequency:	50/60Hz
Main Heating Relay:	16A max
Auxiliary Heating Relay:	3A max
Working temp:	0-50°C
Storage temp:	-25-50°C
Accuracy of temp. control:	<u>+</u> 1°C

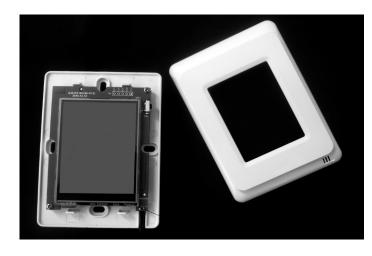

Probe temperature / Ω values	
Temp °C	Resistance value k $\pmb{\Omega}$'s
0	22.28
5	22.05
10	17.96
15	14.69
20	12.09
25	10.00
30	8.31

Warranty

Warmfloor warrants this product to be free from workmanship or material defects for a period of three (3) years from the date of purchase by the consumer. Warmfloor reserves the right to repair or provide a replacement unit at their discretion. This warranty does not cover removal or re-installation costs.

Certification: EN 60730-2-9VEN50081-1/EN50082-2 (EMC testing standard) and IEC-607-60730-2-9.

Declaration of Conformity may be downloaded from www.warmfloornz.com